



CHESHIRE
mouldings
TRADE

**String
Veneer**
Fitting
Instructions

DESIGNED BY
EASY
INSTALLATION
FITTERS FOR

Important Information



- Make sure all surfaces are free from debris and clean from dirt.
- Practise on a test piece before you start your project, this will reduce the chance of any mistakes being made.
- Ensure your iron is hot.
- You cover the veneer with a piece of paper.
- You remove all air bubbles by pressing firmly and moving slowly between the baserail and the bottom edge of the veneer.

Fig. 1

This veneer is designed to be applied to your existing staircase string.

Firstly prepare your surface. Sand to remove any lumps, bumps and oils, wipe clean the surface from any dust, this will allow the adhesive a better chance of attaching to the string.

Simply cut your veneer to size and stick onto your existing staircase string using masking tape at each end.

Fig. 2

We suggest that you firstly test the following steps on a small test piece to make sure that you know exactly how the process works.

Place a piece of paper large enough to cover over your string veneer whilst taking a hot iron apply heat from the top of the veneer in a downwards motion pressing firmly in a downwards motion to the bottom of the veneer making sure you push out all the air bubbles to the bottom of the string.


Fig. 3

Repeat this action a couple of times to ensure the adhesive has melted and stuck to the string.

Repeat this motion all the way down the string pressing firmly as you go.

Fig. 4

Trim any excess of the string veneer off and varnish or oil to suit.

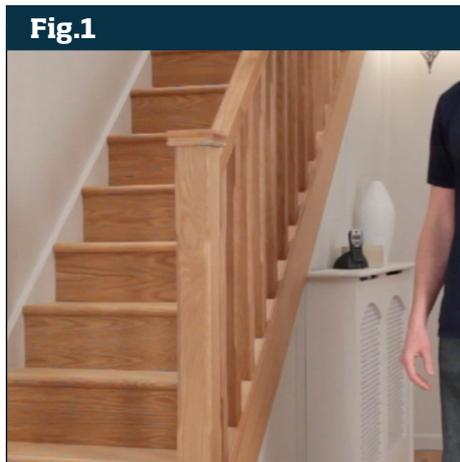

Technical Helpline:
Freephone
0800 085 3475